
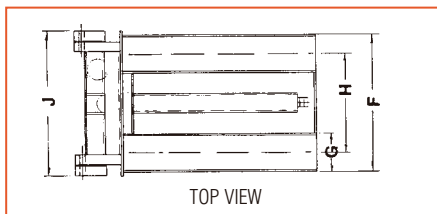
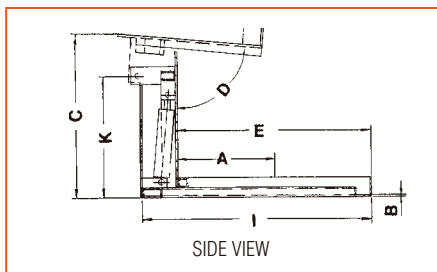


STATIONARY TILTER

2,000/4,000/6,000 LBS



TILT ANGLE

- 0-85°

SAFETY

- Velocity fuse on each cylinder to eliminate tilter from collapsing due to hose failure
- Hold down tabs (3 points)

LOWERED HEIGHT OF TILTER

- Floor level

POWER SUPPLIES

Air/Hydraulic

Foot Pedal

(80 p.s.i., 20 c.f.m. min.)

(hand held pendant optional)

A/C 115/60/1

Hand Held or Foot Control (Standard)

OPTIONS

- Tilt Angle increases or reduces

***NOTE:** Must be bolted into place before using

SPECIFICATIONS		STR 20	STR 40/STR 60
Capacity	lbs.	2,000	4,000 / 6,000
A Load Centre	in.	20	20
B Lowered Height	in.	5/16 c/w beveled edge	3/8" c/w beveled edge
C Lift	in.	32	32
D Tilt Angle		85°	85°
E Fork Length	in.	40	40
F Fork Width	in.	29	29
G Fork Width	in.	8	8
H Fork Center	in.	20 1/2	20 1/2
I Overall Length	in.	47	47
J Width	in.	30	30
K Height	in.	25	25
Weight	lbs.	450	650