

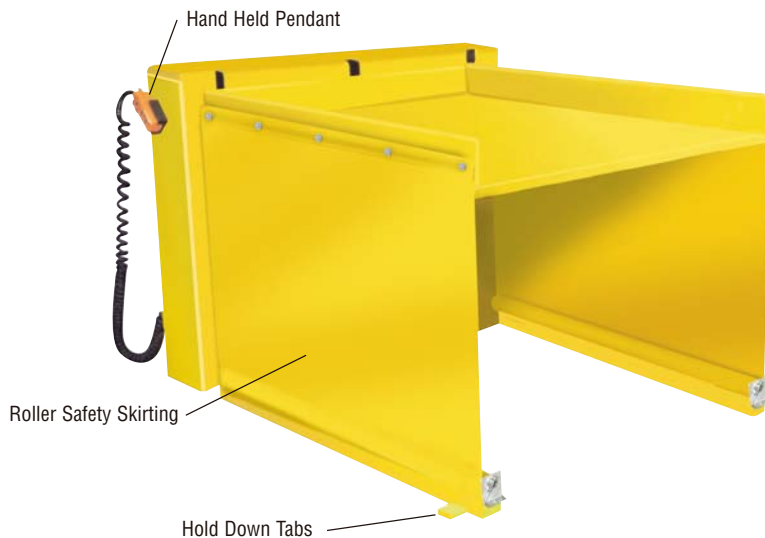


DRIVE-ON LOADING DOCK


1,000/2,000/4,000 LBS

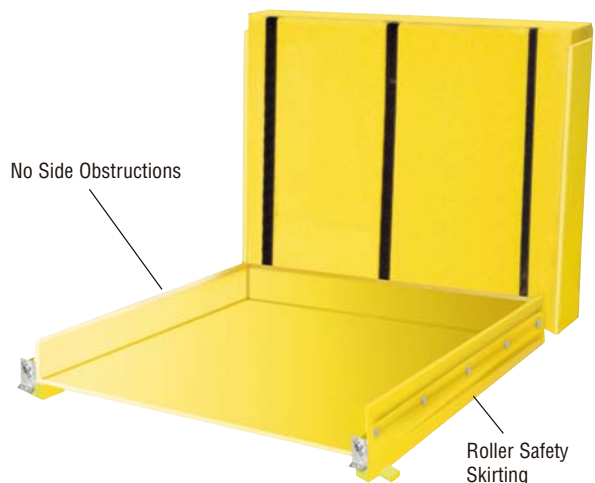

DRIVE-ONS



OPTIONS

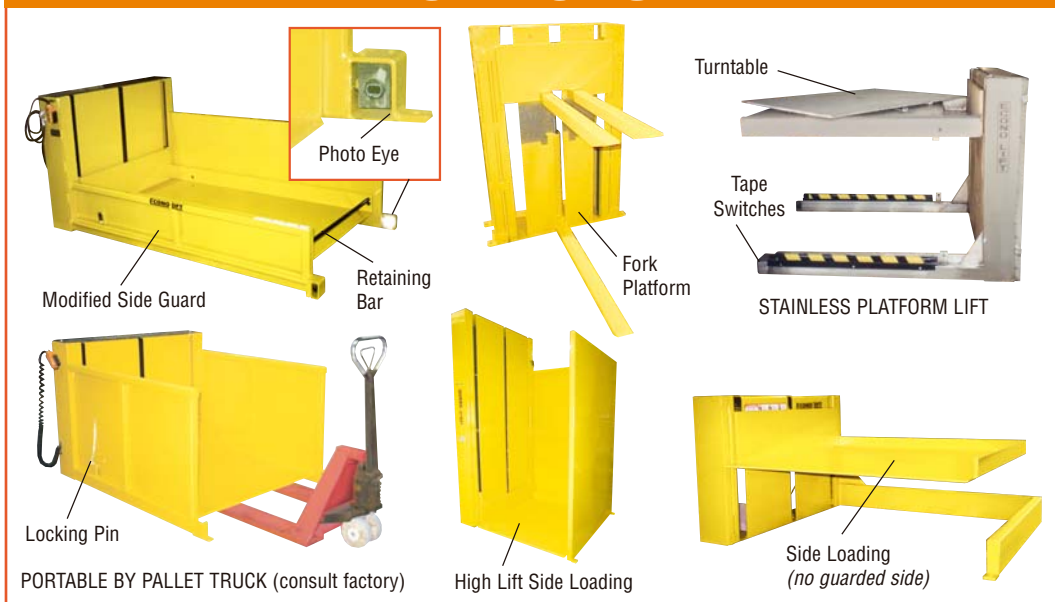

VERTICAL TRAVEL

- 28"

SAFETY

- Velocity fuse on each cylinder to eliminate collapsing due to hose failure
- Hold down tabs on all four corners
- Photo eye to interrupt lowering in the event of an obstruction (*optional*)

LOWERED HEIGHT

- Floor level
- Beveled edge on platform

POWER SUPPLIES

A/C 115/1/60 volt

Hand control (std)
foot optional)

A/C 460/575 volt

Three phase motors (*optional*)

Air/Hydraulic

Foot Control is available

PORTABILITY

- Pins to lock platform 3 1/2" off ground so a pallet truck or fork lift can easily move unit to another area

OPTIONS

- Platforms wider or longer
- Higher lift height
- Galvanized, stainless steel or "Steel-it" epoxy paint available
- Side Loading
- Tape Switches
- Turntable
- Retaining Bar
- Safety Photo Eye

MODEL NO.	CAPACITY (LBS.)	PLATFORM SIZE (IN.)	LOW'D HEIGHT (IN.)	VERTICAL TRAVEL (IN.)	OVERALL SIZE (IN.)	REAR HEIGHT (IN.)
DO-PL44-10	1,000	44 x 50	3/8	28	48 x 57	46
DO-PL50-10	1,000	50 x 50	3/8	28	54 x 57	46
DO-PL44-20	2,000	44 x 50	1/2	28	48 x 57	46
DO-PL50-20	2,000	50 x 50	1/2	28	54 x 57	46
DO-PL44-40	4,000	44 x 50	1/2	28	48 x 57	46
DO-PL50-40	4,000	50 x 50	1/2	28	54 x 57	46