

LIFT TABLE

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS



LIFT & TILTS

CAPACITY

- 2,000/3,000/4,000/
5,000/6,000 lbs.

PLATFORM SIZES

- 24" wide x 36" long
to 72" wide x 96" long

BASE SIZES

- Standard 24", 36", 48" wide
x 36", 48", 60", 72" long

TRAVEL

- 24", 36", 42", 48" vertical travel

LOWERED HEIGHT

- 7" & 9"

SAFETY

- Velocity fuse is standard on each cylinder
- Heavy duty hydraulic cylinders - chrome plated rod with polyurethane seals

POWER SUPPLIES

A/C 110/1/60 volt (standard)

Hand or foot operated

A/C 460/575/3/60 volt (opt.)

Hand or foot operated

Air/Hydraulic

Foot operated (standard)

Hand operated (optional)

- Internally mounted
- Easily accessible for maintenance or repair
- Motors - Single phase 1 h.p. and three phase 1-1/2 h.p. - hand or foot operated standard

MAINTENANCE

- Hinged table top provides easy access to power unit and cylinders
- Self lubricated bronze bushings on all wear points

OPTIONS

- Oversized platforms
- Beveled edges for pit mounting
- Eye-bolts for pit mounting
- Rotating tops
 - spring detents
 - manual detents
- Roller conveyor, Ball transfer tops
- Bellow safety skirting
- Safety tape switch
- Safety touch bars
- Semi-portable
- Portable
- Tandem lifts
- Double scissor lifts

SPECIFICATIONS

STANDARD 24" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
24" TRAVEL - 24" WIDE x 36" LONG PLATFORM/BASE									
SL24-20	2,000	24 x 36	48 x 60	7	33	15	1	115/1/60	450
SL24-40	4,000	24 x 36	48 x 60	7	33	21	1 1/2	115/1/60	470
SL24-60	6,000	24 x 36	48 x 60	9	33	32	1 1/2	115/1/60	520
36" TRAVEL - 24" WIDE x 48" LONG PLATFORM/BASE									
SL36-20	2,000	24 x 48	48 x 72	7	45	17	1	115/1/60	600
SL36-30	3,000	24 x 48	48 x 72	7	45	30	1	115/1/60	620
SL36-40	4,000	24 x 48	48 x 72	7	45	37	1 1/2	115/1/60	650
SL36-50	5,000	24 x 48	48 x 72	9	45	25	1 1/2	208, 220, 460, 575/3/60	680
SL36-60	6,000	24 x 48	48 x 72	9	45	35	1 1/2	208, 220, 460, 575/3/60	700
42" TRAVEL - 24" WIDE x 60" LONG PLATFORM/BASE									
SL42-20	2,000	24 x 60	48 x 84	7	51	25	1	115/1/60	625
SL42-40	4,000	24 x 60	48 x 84	7	51	47	1 1/2	115/1/60	800
SL42-60	6,000	24 x 60	48 x 84	9	51	50	1 1/2	208, 220, 460, 575/3/60	950
48" TRAVEL - 24" WIDE x 72" LONG PLATFORM/BASE									
SL48-20	2,000	24 x 72	48 x 96	7	57	32	1	115/1/60	800
SL48-40	4,000	24 x 72	48 x 96	7	57	43	1 1/2	115/1/60	950
SL48-60	6,000	24 x 72	48 x 96	9	57	38	1 1/2	208, 220, 460, 575/3/60	1,200

SPECIFICATIONS - wide based units; for wider platform applications and greater stability.

36" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
24" TRAVEL - 36" WIDE x 36" LONG PLATFORM/BASE									
3SL24-20	2,000	36 x 36	60 x 60	7	33	15	1	115/1/60	480
3SL24-40	4,000	36 x 36	60 x 60	7	33	21	1 1/2	115/1/60	520
3SL24-60	6,000	36 x 36	60 x 60	9	33	32	1 1/2	115/1/60	550
36" TRAVEL - 36" WIDE x 48" LONG PLATFORM/BASE									
3SL36-20	2,000	36 x 48	60 x 72	7	45	17	1	115/1/60	750
3SL36-40	4,000	36 x 48	60 x 72	7	45	38	1 1/2	115/1/60	790
3SL36-60	6,000	36 x 48	60 x 72	9	45	28	1 1/2	208, 220, 460, 575/3/60	850
42" TRAVEL - 36" WIDE x 60" LONG PLATFORM/BASE									
3SL42-20	2,000	36 x 60	60 x 84	7	51	25	1	115/1/60	830
3SL42-40	4,000	36 x 60	60 x 84	7	51	42	1 1/2	115/1/60	890
3SL42-60	6,000	36 x 60	60 x 84	9	51	34	1 1/2	208, 220, 460, 575/3/60	950
48" TRAVEL - 36" WIDE x 72" LONG PLATFORM/BASE									
3SL48-20	2,000	36 x 72	60 x 96	7	57	32	1	115/1/60	1,100
3SL48-40	4,000	36 x 72	60 x 96	7	57	43	1 1/2	115/1/60	1,200
3SL48-60	6,000	36 x 72	60 x 96	9	57	38	1 1/2	208, 220, 460, 575/3/60	1,280

48" WIDE BASE LIFT TABLES

MODEL NO.	CAPACITY (LBS.)	STD. PLAT. BASE (W x L) (IN.)	OVERSIZED PLATFORMS (UP TO) (IN.)	LOW HT (IN.)	RAISED HT (IN.)	UP SPEED (SEC.)	MOTOR (H.P.)	VOLT/HP/HZ	SHIP WEIGHT (LBS)
24" TRAVEL - 48" WIDE x 36" LONG PLATFORM/BASE									
4SL24-20	2,000	48 x 36	72 x 60	7	33	15	1	115/1/60	700
4SL24-40	4,000	48 x 36	72 x 60	7	33	24	1 1/2	115/1/60	740
4SL24-60	6,000	48 x 36	72 x 60	9	33	34	1 1/2	115/1/60	780
36" TRAVEL - 48" WIDE x 48" LONG PLATFORM/BASE									
4SL36-20	2,000	48 x 48	72 x 72	7	45	17	1	115/1/60	840
4SL36-40	4,000	48 x 48	72 x 72	7	45	38	1 1/2	115/1/60	890
4SL36-60	6,000	48 x 48	72 x 72	9	45	26	1 1/2	208, 220, 460, 575/3/60	950
42" TRAVEL - 48" WIDE x 60" LONG PLATFORM/BASE									
4SL42-20	2,000	48 x 60	72 x 84	7	51	26	1	115/1/60	890
4SL42-40	4,000	48 x 60	72 x 84	7	51	42	1 1/2	115/1/60	950
4SL42-60	6,000	48 x 60	72 x 84	9	51	34	1 1/2	208, 220, 460, 575/3/60	1,000
48" TRAVEL - 48" WIDE x 72" LONG PLATFORM/BASE									
4SL48-20	2,000	48 x 72	72 x 96	7	57	32	1	115/1/60	950
4SL48-40	4,000	48 x 72	72 x 96	7	57	43	1 1/2	115/1/60	1,100
4SL48-60	6,000	48 x 72	72 x 96	9	57	38	1 1/2	208, 220, 460, 575/3/60	1,200

See page 8 for options available.



LIFT TABLE

2,000 / 3,000 / 4,000 / 5,000 / 6,000 LBS

LIFT & TILTS



OPTIONS



WIDE BASE LIFT TABLE
Oversize Checker Board Top



Beveled Edge for Pit Mounted Applications



TANDEM LIFT




SELF PROPELLED LIFT TABLE



LOADING DOCK APPLICATION



SEMI-PORTABLE OPTION

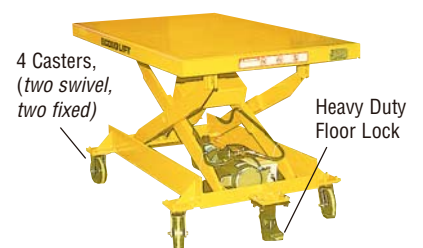

PORTABLE OPTION