


TILT TABLE

1,000/ 2,000/ 4,000/ 6,000 LBS

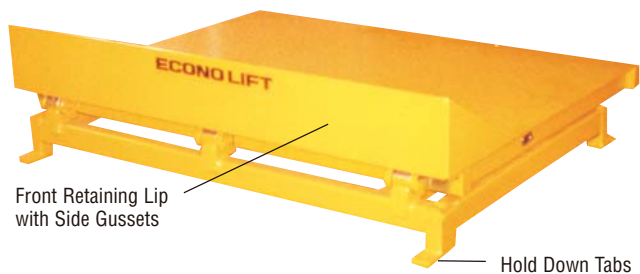

CAPACITY

- 1,000/2,000/4,000/6,000 lbs.

TILT ANGLE

- 0-45 degrees (standard)

FRONT RETAINING LIP

- 8" high (standard)

SAFETY

- Velocity fuses on each cylinder to eliminate the table from collapsing due to hose failure
- Hold down tabs on all four corners

LOWERED HEIGHT

- 9"

POWER SUPPLIES

A/C 110/1/60 volt
Hand or foot operated (standard)

A/C 220/460/575/3/60
Hand or foot operated (optional)

Air/Hydraulic
Foot operated (standard)
Hand operated (optional)

SAFETY

- Bellow safety skirting
- Safety tape switch
- Retaining lip - larger or smaller
- Conveyor or ball transfer tops


OPTIONS

- Platforms: larger or smaller
- Tilt Angle: increased or restricted
- Mounted on carousel


OPTIONS



OVERSIZE PLATFORM

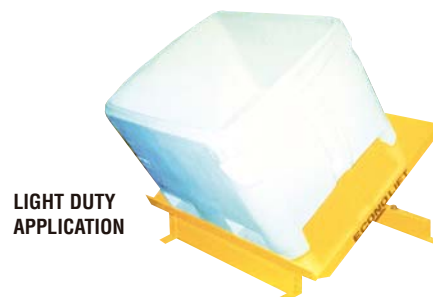

LIGHT DUTY APPLICATION

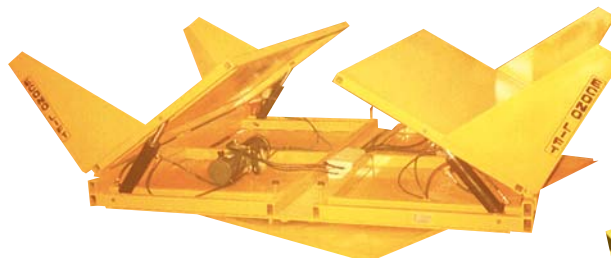


TILT TABLE MOUNTED ON A CARROUSEL



Larger Front Retaining Plate

Bellow Safety Skirting

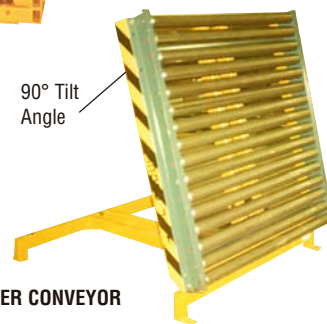

90° Tilt Angle

ROLLER CONVEYOR

MODEL NO.	CAPACITY (Lbs.)	PLATFORM SIZE (W X D) (IN.)	MAXIMUM PLATFORM SIZE (W X D)	TILT ANGLE	RAISING TIME (seconds)	WEIGHT (Lbs.)
24" WIDE TILT TABLES						
TRT-1-2436	1,000	24 x 36	48 x 48	45°	15	250
TRT-2-2436	2,000	24 x 36	48 x 48	45°	18	380
TRT-4-2436	4,000	24 x 36	48 x 48	45°	20	410
TRT-6-2436	6,000	24 x 36	48 x 48	45°	22	430
50" WIDE TILT TABLES						
TRT-1-5050	1,000	50 x 50	72 x 72	45°	18	320
TRT-2-5050	2,000	50 x 50	72 x 72	45°	23	450
TRT-4-5050	4,000	50 x 50	72 x 72	45°	25	490
TRT-6-5050	6,000	50 x 50	72 x 72	45°	30	580